

A-S230CWX

COLOR BULLET CAMERA



PRECAUTIONS

* Power Requirements

The equipment should be operated only with the type of power source indicated on the marking label. This camera is designed for use with a regulated 15V DC power source.

● Impedance

This camera is to be used with a standard 75 ohm impedance monitor. On monitors with both a high and standard impedance mode, ensure the impedance mode is set to standard.

● Service

Do not attempt to service the camera yourself. There are no user serviceable parts inside. Refer servicing to a qualified service technician.

● Light Exposure

Do not aim or point the camera towards the sun or into a bright light.

SPECIFICATIONS

Image Device	1/3" super HAD SONY CCD
Signal System	60Hz
Effective Pixels	510(H) × 492(V)
Scanning System	2:1 Interlace
Sync. System	Internal
Horizontal Resolution	More than 380 TVL
Sensitivity	0.5Lux / F2.0
S / N Ratio	More than 48dB
Gamma Correction	$\gamma = 0.45$
Video Output	Composite 1Vp-p, 75(ϕ) unbalanced
Electronic Shutter	1/60 ~ 1/100,000 sec Auto
Power Supply	15V DC($\pm 10\%$)
Operating Temperature	14° F ~ 104° F (-10°C ~ +40°C)
Storage Temperature	-22° F ~ 122° F (-30°C ~ +50°C)
Weight	2.65 oz (75g)
Dimension	23(mm) ϕ × 75(mm)
Lens	f3.6mm fixed focal board type lens.

CAMERA CONNECTIONS


The A-S230CWX camera can be used in video systems with either BNC or Modular connections.

The cable on the camera has a BNC connection for video output and a power connector for a 15V DC power source (not included).

For use in applications with modular connections, the BNC-to-RJ11 Adapter Cable included with the camera connects between the BNC and Power connection on the camera to an RJ11 cable (not included).

The A-S230CWX camera comes with the following cables and accessories:

- 60 ft (18M) cable with RJ11 connections on each end
- BNC-to-RJ11 Adapter Cable
- Camera mount

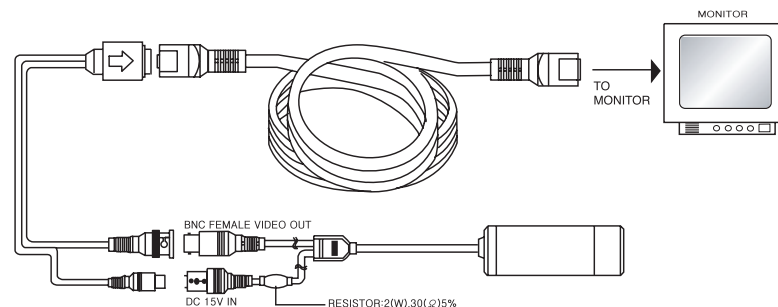

DIMENSIONS

