



## Height-Strip (HS) / Mini-Strip (MS) Day/Night Specialty Cameras

### KEY FEATURES AND BENEFITS

#### Shared Features

- High resolution 600TVL color (700TVL B/W) 1/3" CCD camera
- Day/Night capability for low light video image reproduction
- Digital Noise Reduction (2D-DNR), Auto Gain Control (AGC) and Side Light Compensation (SLC)
- 3.7mm fixed iris, pinhole lens
- Minimum scene illumination 0.1Lux (Color); 0.04Lux (B/W)
- Swivel gimble bracket allows easy adjustment of the horizontal camera angle to accommodate double entry doors
- Unique 5° vertical tilt lever on back of camera for adjusting vertical camera angle

#### Height Strip Model

- Graduated and color coded height measurements in U.S. and Metric dimensions for easy height identification
- Camera height options of 5'-0" or 5'-6" (default)
- Optional models interface with standard ADT RJ-11 systems or with 12VDC power supply and BNC connector

#### Mini-Strip Model

- Black anodized aluminum housing to match most standard commercial door frames
- Designed to be installed vertically or horizontally, simply by adjusting camera orientation 90degrees (default is for vertical orientation)
- Includes 12VDC power supply

### ORDERING INFORMATION

SCN#	Item
CHVD37JB	High Res (600TVL) D/N Color Camera, Height-Strip, 3.7mm wide-angle lens, RJ-11 cabling, black housing
CHVD37PB	High Res (600TVL) D/N Color Camera, Height-Strip, 3.7mm wide-angle lens, regulated 12VDC power supply, black housing
CHVD37PS	High Res (600TVL) D/N Color Camera, Height-Strip, 3.7mm wide-angle lens, regulated 12VDC power supply, grey housing
CSVD37PB	High Res (600TVL) D/N Color Camera, Mini-Strip, 3.7mm wide-angle lens, regulated 12VDC power supply, black housing



**Business  
Solutions**


# Height-Strip (HS) / Mini-Strip (MS) Day/Night Specialty Cameras

## Product Specifications

Image Sensor	1/3" Color CCD
Resolution	600TVL (Color); 700TVL (B/W)
Pinhole Lens	3.7mm, fixed iris
Electronic Iris	1/60 ~ 1/100,000 Sec.
Minimum Illum.	0.1Lux Color; 0.01Lux B/W - F1.2
Video Output	1.0Vp-p (75-ohms)
Signal/Noise Ratio	>50dB
SLC	Auto
2D-DNR	Auto
AGC	On
White Balance	Auto(ATW)
Day/Night	Auto
Video	BNC
Power	Terminal Block
Dimensions (WxHxD):	<b>(HS)</b> 1.75 x 34.35 x 1.375in (44.45 x 872.6 x 34.9mm) <b>(MS)</b> 1.75 x 6.35 x 1.375in (44.45 x 161.4 x 34.9mm)
Weight	<b>(HS)</b> 2.8lbs (1.26kg) <b>(MS)</b> 0.72lbs (.325kg)
Power	12 VDC, 130ma (1.5W)
Operating Temperature	14°F ~ 122°F (-10°C ~ + 50°C)
Certifications	UL, FCC, CE, RoHS


Specifications subject to change without notice.

## Dimensions

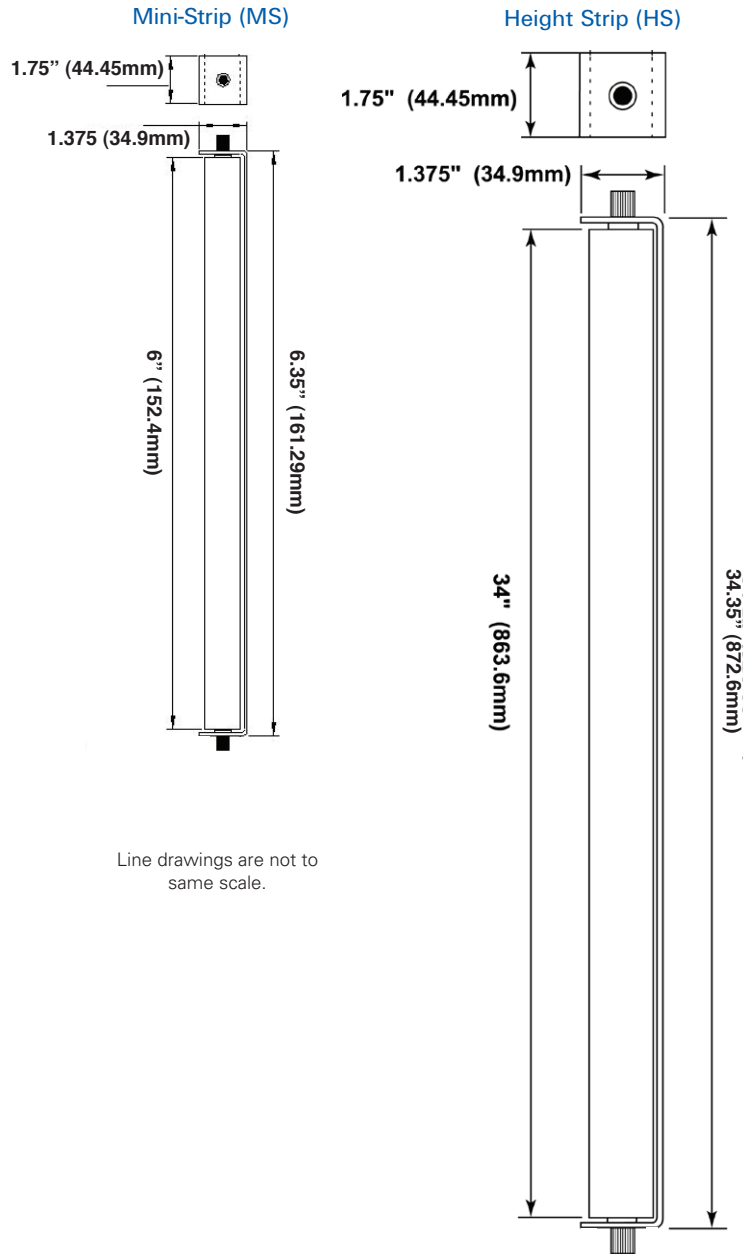

Line drawings are not to same scale.

## Range of View from above with Camera

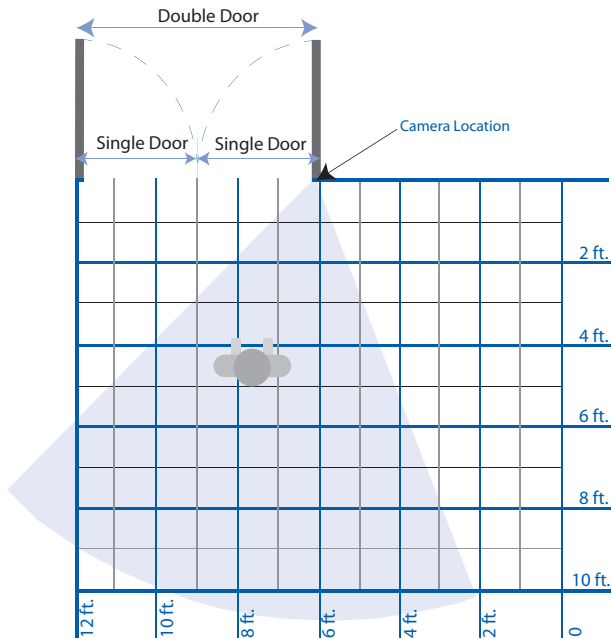

For more information visit [www.ADT-Matrix.com](http://www.ADT-Matrix.com)

© 2011 ADT—All Rights Reserved. ADT Security Services Inc. ADT, the ADT logo and ADT *Always There* are registered trademarks of ADT Services AG and are used under license.

