

1/3" & 1/4" Covert CCD Cameras



Features

- *Intended for use with A-O14QBP B/W, A-O14QCP Color Quad; A-O14SBP B/W and A-O14SCP Color Sequential Switcher Observation Systems as a covert accessory camera.*
- *1/3" and 1/4" CCD image sensors produce high quality video image capture.*
- *Wide-angle 4.3mm and 5.5mm lenses allow large-area monitoring from a single camera.*
- *Accessory input allows connection of alarm contacts.*
- *Aesthetically pleasing housings blend with most installations.*
- *60' video/audio cable with modular 6-pin connector is included.*

Installation and Operation

The covert cameras are 1/3" and 1/4" CCD cameras housed inside various consumer housings and a non-working PIR housing and are suitable for indoor covert video camera applications. The cameras connect to the observation systems using a quick-connect cable with 6-pin RJ-11-E connectors. Additional accessories may be connected to the cameras using the second RJ-11-E accessory port located on the back of the camera housing. The cameras do not allow audio monitoring capability. A 60-foot camera-to-monitor video/accessory cable is included with each unit.

Specifications

Video Monitor

B/W: 1/3" IT CCD
Color: 1/4" IT CCD

Active Pixels

512 x 492

Resolution

B/W: > 380 lines
Color: > 330 lines

Minimum Illumination

B/W: 1.0 lux 50 IRE (F1.2)
Color: 2.0 lux 50 IRE (F2.0)

Video Output

1.0Vp-p (75 Ohms), 6-pin modular

Lens

B/W: 5.5mm
Color: 4.3mm






Camera Connectors

Video/audio: 6-pin modular
Accessory: 6-pin modular

Ordering Guide:

SCN#	Item
A-CB38S1	B/W Wall Clock
A-CB38S4	B/W Picture Frame
A-CB38S9	B/W Smoke Detector Housing
A-CB38S13	B/W Golf Clock
A-CB38PIR	B/W Non-working PIR
A-CC42S1	Color Wall Clock
A-CC42S4	Color Picture Frame
A-CC42S9	Color Smoke Detector Housing
A-CC42S13	Color Golf Clock
A-CC42PIR	Color Non-working PIR



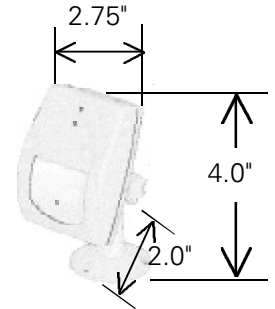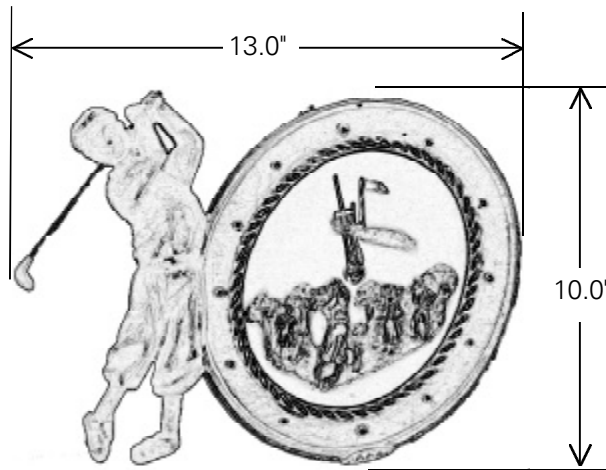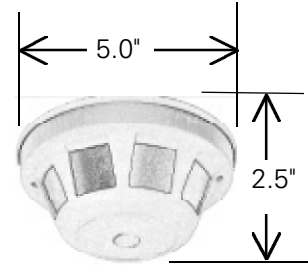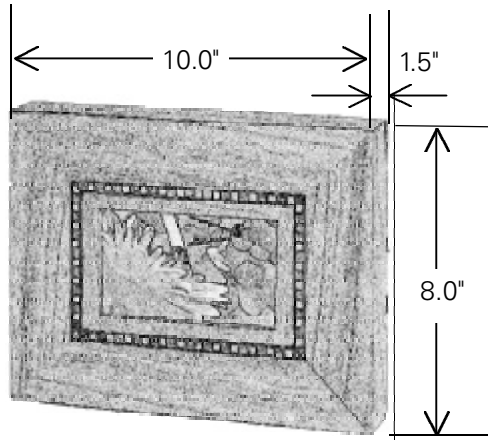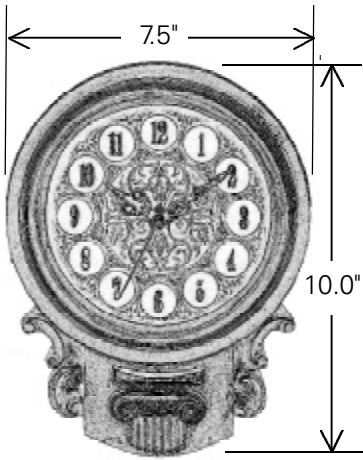

Fixed Iris Lens

The covert cameras are supplied with a 4.3mm and 5.5mm fixed iris lens. No iris adjustment is necessary with these lenses.

Optional Accessories	
A-A18C	60' Camera cable
A-A30C	100' Camera cable
A-A60C	200' Camera cable
A-A90C	300' Camera cable
A-SC20	60' Cable RJ-11 accessory input, camera to 2-wire NC contact
A-TV190PA	Cable, 6' RJ-11 to 2-RCA and power supply for A/V connections
A-MA800	Modular cable adapter



One Town Center Road
Boca Raton, FL 33486
www.adt.com